FLUSH MOUNT CEILING LIGHTS

Opal

Mosaic alabaster flush mount ceiling light

A slim drum of real alabaster pieces fitted together like a mosaic, glowing warm and mineral from edge to edge.



SPECIFICATIONS

PRODUCT TYPE	Flush Mount Ceiling Lights
WIDTH	Ø 15.7 in / 40 cm · Ø 19.7 in / 50 cm · Ø 23.6 in / 60 cm
HEIGHT	2 in / 5 cm (all sizes)
MATERIALS & FINISH	Genuine mosaic alabaster (snowflake stone) on metal, brass centre
LIGHT SOURCE	Integrated LED
COLOR TEMPERATURE	3000K warm white
DIMMING	Triac-dimmable version available
VOLTAGE	AC 110–240V
INSTALLATION	Hardwired flush ceiling mount; licensed electrician recommended
FINISH	white alabaster with gold centre

Dimensions are approximate (±0.4 in / 1 cm). Natural and hand-finished materials vary slightly from piece to piece.

OPTIONS

SIZE
Ø 15.7 in, Ø 19.7 in, Ø 23.6 in


DIMMING
Standard, Dimmable (Triac)

KEY FEATURES

- **Genuine alabaster.** real snowflake stone pieces, not resin or acrylic
- **Ultra-slim.** only 2 in / 5 cm deep
- **Integrated warm LED.** 3000K warm white, with a Triac-dimmable option
- **Mosaic craft.** every piece has its own pattern
- **Three sizes.** Ø 15.7 in, 19.7 in or 23.6 in

PROJECT	FIXTURE TYPE / TAG	LOCATION	QTY · APPROVED

Dimensions

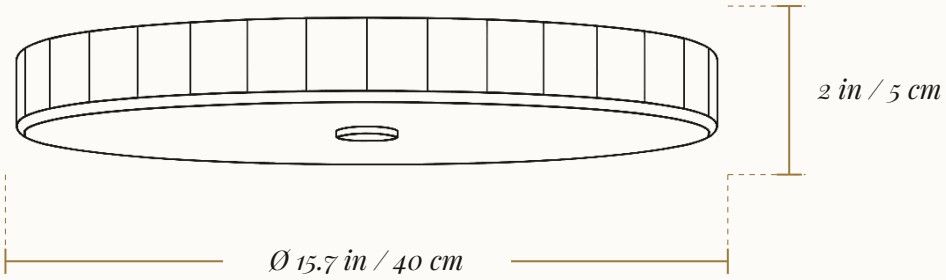

FRONT ELEVATION · NOT TO SCALE · FIRST LISTED SIZE SHOWN

AVAILABLE SIZES

SIZE	WIDTH	HEIGHT
All sizes	Ø 15.7 in / 40 cm	2 in / 5 cm
Ø 19.7 in	Ø 19.7 in / 50 cm	2 in / 5 cm
Ø 23.6 in	Ø 23.6 in / 60 cm	2 in / 5 cm

Overall dimensions of the fixture. Allow clearance around the fixture as described on page 4.

Tiixo	
FIXTURE Opal · Flush Mount Ceiling Lights	
DRAWING NO. TX-CL-44256-D1	VIEW Front elevation
SCALE Not to scale	UNITS in / cm
ISSUED 13 Oct 2026	REVISION A

Ordering information

Catalogue numbers are Tiixo reference numbers. Every configuration of Opal currently offered, with its catalogue number. Quote the catalogue number when ordering or contacting us.

CONFIGURATIONS

SIZE	DIMMING	CATALOGUE NO.
Ø 15.7 in	Standard	TX-CL-44256-01
Ø 15.7 in	Dimmable (Triac)	TX-CL-44256-02
Ø 19.7 in	Standard	TX-CL-44256-03
Ø 19.7 in	Dimmable (Triac)	TX-CL-44256-04
Ø 23.6 in	Standard	TX-CL-44256-05
Ø 23.6 in	Dimmable (Triac)	TX-CL-44256-06

CARE & MAINTENANCE

Switch off and let the fixture cool. Dust with a soft, dry cloth; no solvents or abrasive cleaners.

WARRANTY & RETURNS

Covered by the Tiixo limited warranty. Returns accepted within 30 days of delivery, unused and in original packaging, with no restocking fee. If it arrives damaged, send a photo within 7 days and we ship a replacement first.

For your electrician

ELECTRICAL

SUPPLY VOLTAGE	AC 110–240V
LIGHT SOURCE	Integrated LED
COLOR TEMPERATURE	3000K warm white
DIMMING	Triac-dimmable version available
INSTALLATION	Hardwired flush ceiling mount; licensed electrician recommended

WIRING (GENERAL GUIDANCE)

FIXTURE WIRE	CONNECT TO
● Black (or ribbed)	Line / hot
○ White (or smooth)	Neutral
● Green / bare copper	Ground

1. Turn power off at the breaker and confirm it is off with a non-contact tester.
2. Fix the mounting bracket to a ceiling junction box rated for the fixture's weight, using the hardware supplied.
3. Make the connections above with approved connectors and fold the wires neatly into the box.
4. Fit the canopy, restore power and test. The LED is built in, so there are no bulbs to fit.

BEFORE YOU INSTALL

- ☐ A ceiling junction box rated for the fixture's weight
- ☐ Supply voltage confirmed for your region
- ☐ Ceiling height measured, so the fixture clears walkways
- ☐ A dimmer, if used, rated for the light source
- ☐ A second person or a stable ladder for lifting the fixture
- ☐ Power off at the breaker before any work begins

PLACEMENT GUIDELINES

ROOM SIZE

Add the room's length and width in feet; that number in inches is a good fixture diameter.

CLEARANCE

Keep at least 84 in (7 ft / 213 cm) from the floor to the bottom of the fixture in walkways.

OVER A TABLE

Choose a fixture about one-half to two-thirds of the table width; a flush or semi-flush mount suits ceilings under 8–9 ft.

> **Safety.** Turn off power at the breaker before installing. Installation must follow local electrical codes (the NEC in the US). We recommend a licensed electrician for every hardwired fixture. Never exceed the rated wattage.

Questions before or during install?
Call or text (813) 790-7240 · support@tiixo.com
9am – 5pm Eastern, seven days. We reply within 12 hours.
Returns. 30 days from delivery, no restocking fee.